



## Shrink Wrapper SW70/SW45

The SW70 and SW45 (smaller version of SW70) shrink wrapping machines represent the latest generation of fully automated shrink wrappers mostly used for secondary packaging in the fields of:

- Food incl. sweets, bakery and ice cream, beverages (no high speed), pharmaceutical products, hardware parts and chemicals. SW70/45 are designed for loose or pre-packed products on trays or in cartons.

They are PLC-controlled with all functions and settings monitored from the touch screen panel integrated in the electrical cabinet. The result is a compact allrounder machine occupying only a small floor area, easily adjustable to the customers needs (modular construction principle).



### Control is everything.

That's why we only use the best quality parts to build our machines. And the Know How of 137 years of engineering expertise.



*Top clamp and welding knife*



*Product outfeed with cooling zone*



*Product infeed*

# Shrink Wrapping Machine

## SW70

### Features

#### Design

- Stainless steel frameless construction (light weight!)
- Straight and hygienic design (easy to clean)

#### Machine

- Mostly secondary packaging
- Fully automatic
- Up to 100 units/min depending on infeed type (collating/stacking/double stacking)
- Option: run 2 packages (double film reels) simultaneously – higher output
- Low film consumption
- 4 heating elements standard (1 integrated in reserve)

#### Maintenance:

- Low maintenance cost
- Open and accessible design
- Easy film loading
- Quick and easy size changeover
- Touch screen operator panel

#### Safety and Quality:






- CE conformity proof (CSA/UL standards on request)
- Saftey covers
- Well isolated oven
- Safety sensor on welding bar and alarm functions
- Only high quality components
- Long life expectancy

#### Leadtime and Aftersales:

- Leadtime only 12 weeks max. from order date to customers site
- Service and spare parts available directly from Sweden
- Own technicians available within 48 hours on site

### Technical Specifications

<b>Sealing time</b>	0 ~ 2 sec.
<b>Film thickness</b>	0.025 - 0.08 mm
<b>Sealing temperature</b>	Adjustable up to 200 °C
<b>Supply voltage</b>	3x400 V+N+PE, 50 Hz (Other supply standards on req.)
<b>Control voltage</b>	24 V DC
<b>Power consumption</b>	15 kW
<b>Air consumption</b>	180 NI/min
<b>Air pressure</b>	0.6 MPa
<b>Noise level</b>	< 70 dB (A)
<b>Weight</b>	700 kg (standard)
<b>Infeed height</b>	800 mm (Adjustable 730–840 mm) Optional extensions legs + roller feet

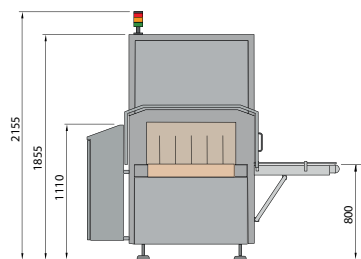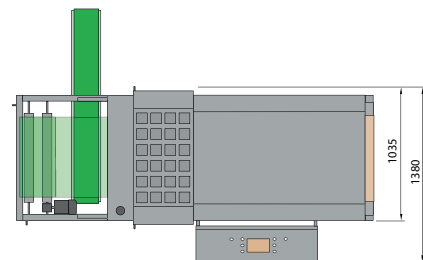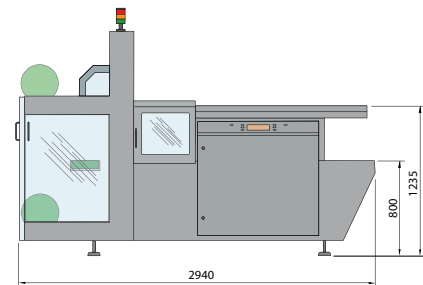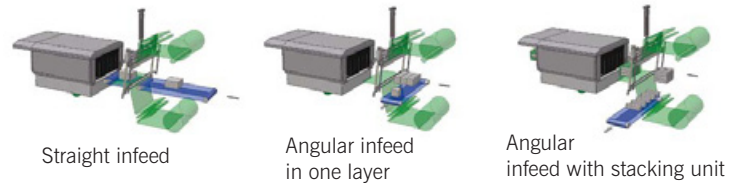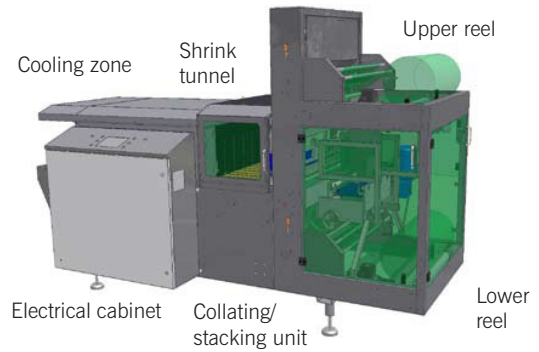

#### Product size (L x W x H mm)

Min 25 x 25 x 25 \*  
Max 600 x 470 x 250


#### Package size (L x W x H mm)

Max 600 x 470 x 250

#### Film reel dimensions

Max Ø 300 x 670 mm (single reel)

\* Depending on stacking/grouping pattern.  
Consult Arenco engineering.



**Arenco Packaging**  
Box 915, SE-391 29 Kalmar  
Phone +46 480 945 12  
info@arenco.com  
**www.arenco.com**  
A division of Arenco AB